




## TOROID-SERIES-Fly Leads 30VA to 320VA



Dimensional drawing

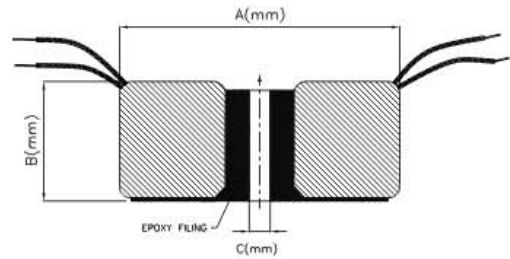

**Specifications:**

Dual Primary: 115 / 230V @ 50 / 60Hz

Dual Secondary: 12 / 24V

Power: 30VA to 320VA

Dielectric Strength: 2500Vrms

**Agency Standards**

Class B Insulation(130 Degree C )


Built to meet CAN / CSA E60065-94

Built to meet UL1411

Built to meet IEC60065

Standard samples will be despatched within 24 hours of receiving order.

Kindly indicate the part number while inquiring.

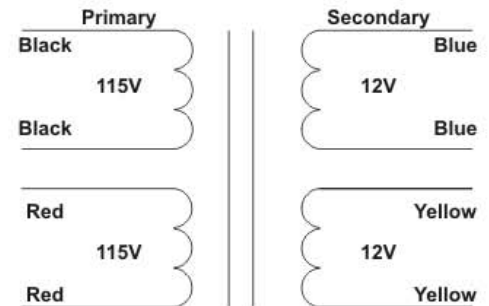

### Technical Data:

Part Number	VA (Size)	Secondary		Mechanical Dimensions (mm)			Weight (KG)
		Series Connected	Parallel Connected	A	B	C	
S-TR908-0030	30	24V CT @ 1.25A 230V CT	12V @ 2.5A 115V	70	35	5	0.45
S-TR909-0040	40	24V CT @ 1.6A 230V CT	12V @ 3.2A 115V	75	40	5	0.57
S-TR910-0050	50	24V CT @ 2.0A 230V CT	12V @ 4.0A 115V	85	45	5	0.74
S-TR911-0075	75	24V CT @ 3.1A 230V CT	12V @ 6.2A 115V	90	45	6	1.00
S-TR912-0080	80	24V CT @ 3.33A 230V CT	12V @ 6.66A 115V	95	45	6	1.10
S-TR913-0100	100	24V CT @ 4.1A 230V CT	12V @ 8.2A 115V	100	45	6	1.32
S-TR914-0160	160	24V CT @ 6.6A 230V CT	12V @ 13.2A 115V	105	60	6	1.72
S-TR915-0260	260	24V CT @ 10.8A 230V CT	12V @ 21.6A 115V	120	65	8	2.58
S-TR916-0320	320	24V CT @ 13.3A 230V CT	12V @ 26.6A 115V	130	60	8	2.88

Custom made transformers are available on request.



**SHILCHAR**  
TECHNOLOGIES LIMITED

